


# Corner Adjustable Frame


EDR-WS

Parts and Tools list


| NO. | Name            | Qty  | NO. | Name           | Qty |
|-----|-----------------|------|-----|----------------|-----|
| 1   | Support Beam2   | 1    | 11  | M6*8 Screw     | 2   |
| 2   | Feet            | 3    | 12  | Rubber Cushion | 10  |
| 3   | M8*16 Screw     | 12   | 13  | Plastic Pad    | 10  |
| 4   | Bracket         | 3    | 14  | ST3.5*19 Screw | 2   |
| 5   | Lifting System  | 1set | 15  | ST4.8*19 Screw | 2   |
| 6   | Support Beam1   | 1    | 16  | ST4.8*25 Screw | 10  |
| 7   | M6*10 Screw     | 16   | 17  | Plastic Mat    | 3   |
| 8   | 4mm Hex Spanner | 1    |     |                |     |
| 9   | 5mm Hex Spanner | 1    |     |                |     |
| 10  | M6*12 Screw     | 18   |     |                |     |

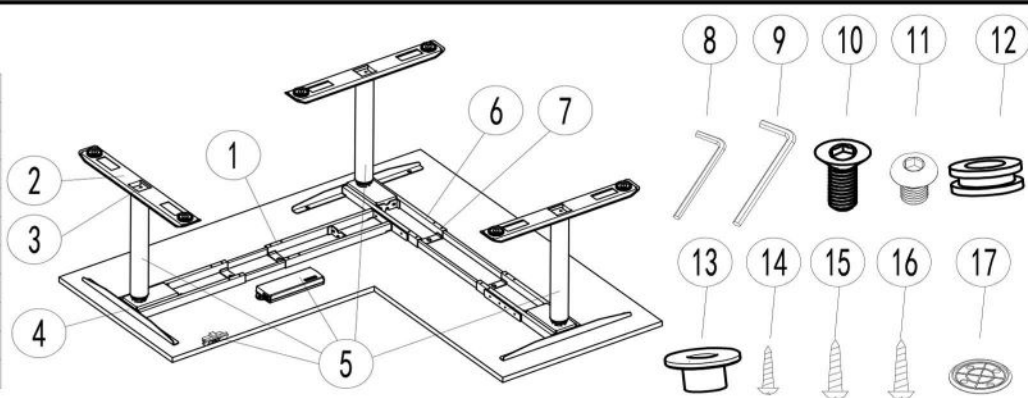


- 1 Loosen the 4 screws of beam1 using 4MM hex spanner, adjust the beam to proper position to fit the desktop.

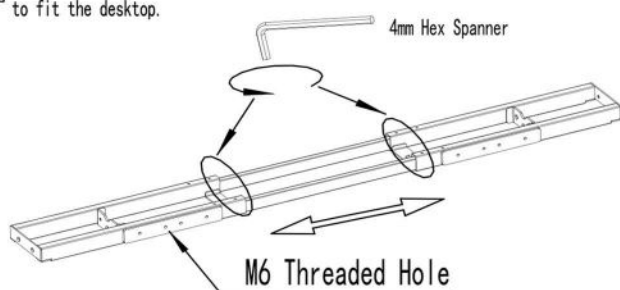


- 2 Attach legs to the beam1 using 8 of M6\*12 screws.

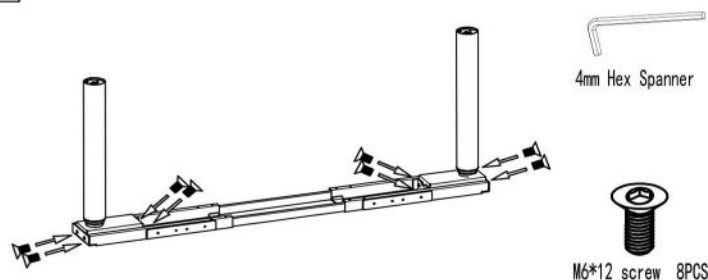


- 3 Attach feet to the legs using 8 of M8\*16 screws.

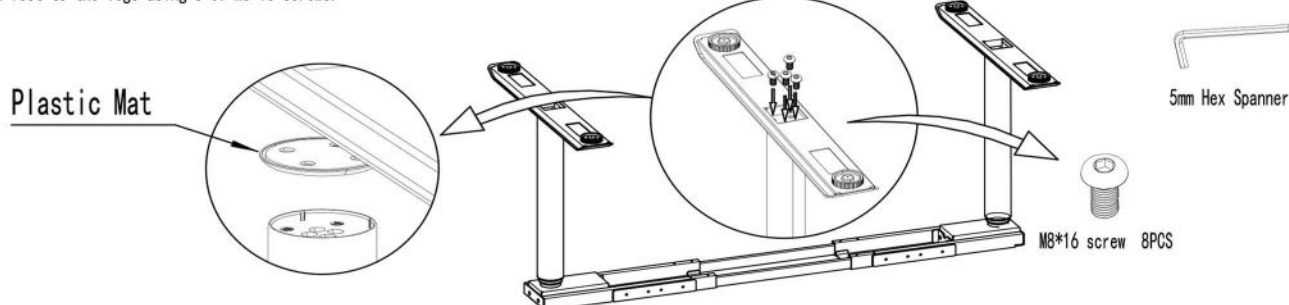


- 4 Loosen the 4 screws of beam2 using 4MM hex spanner, adjust the beam to proper position to fit the desktop.

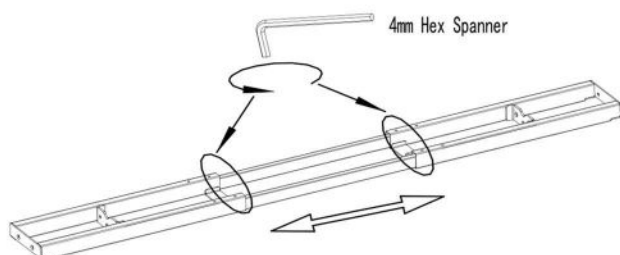

- 5 Attach legs to the beam2 using 4 of M6\*12 screws.

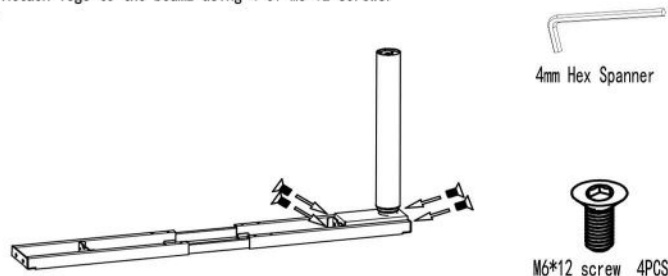


- 6 Attach feet to the leg using 4 of M8\*16 screws.

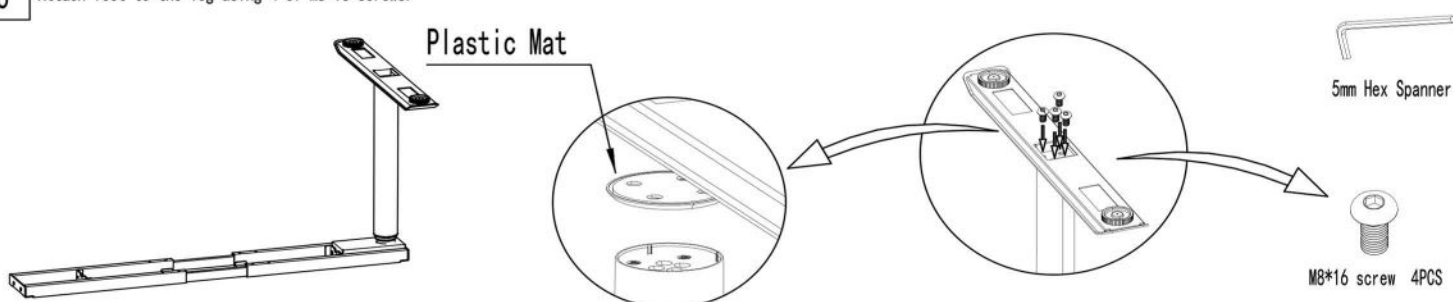

# Corner Adjustable Frame

EDR-WS


- 7 Attach the beam2 to the beam1 using 2 of M6\*8 screws.

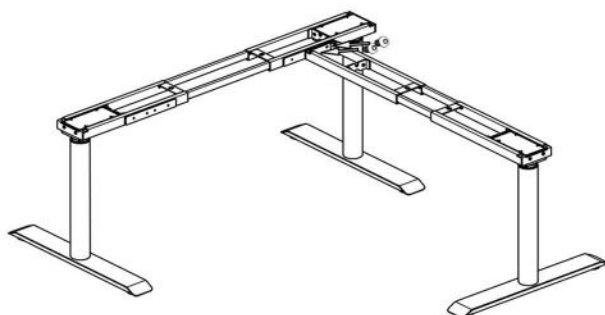

4mm Hex Spanner

M6\*8 screw 2PCS

- 8 Attach brackets to beam using 6 of M6\*12 screws, and then fit the rubber cushion and plastic pad to the brackets and beams.

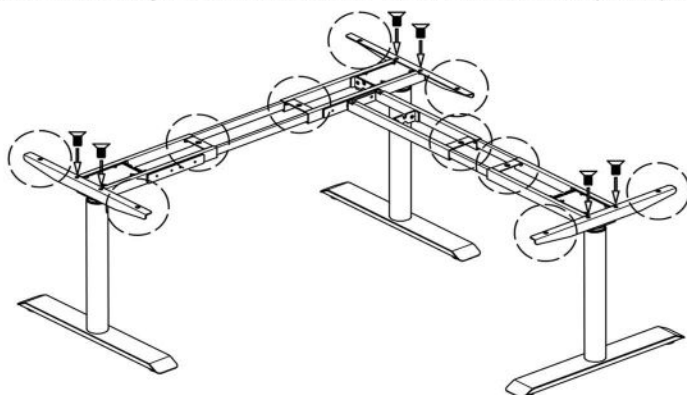



4mm Hex Spanner

M6\*12 screw 6PCS

Rubber Cushion 10PCS

Plastic Pad 10PCS

- 9 Fix table top to the frame with 10 of ST4.8\*25 screws, then fix the control box to below table top with 2 of ST4.8\*19 screws, at last fix the handset to below table top with 2 of ST3.5\*19 screws. (fix the beam with the M6\*10 screw in the screw package and the screw on the beam)

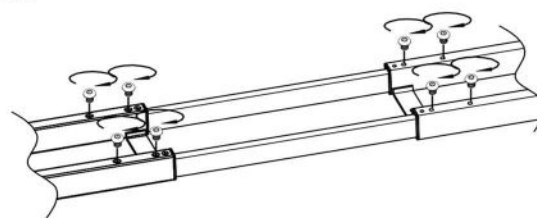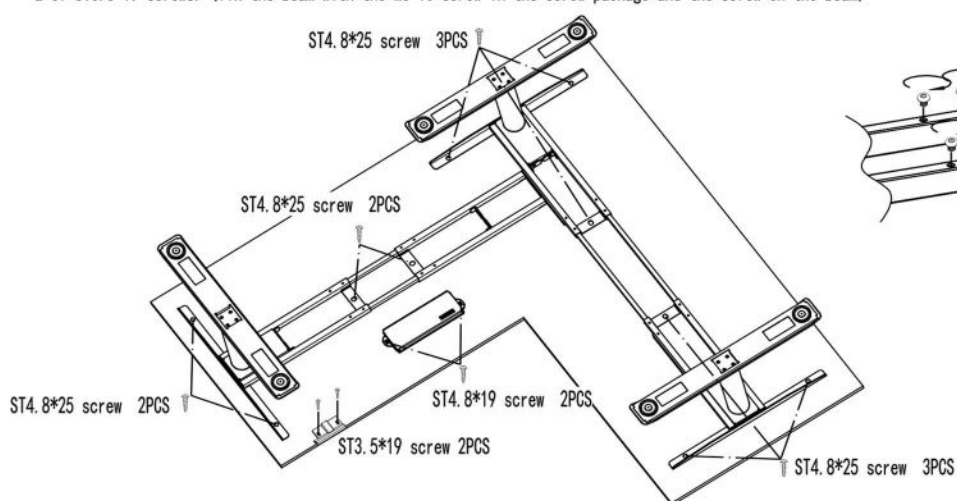

- 10 Connect the control box to the handset and to the motor.

